Chain wire-drawing machines

Chain wire-drawing machine 2000 kg. drawing power Mod. TK 20/EX

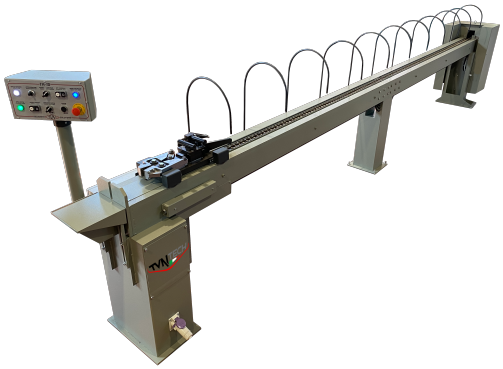

Dimensioni

Lung.	6950
Larg.	880
Alt.	1400
Peso circa	1380
Pot.	4

Caratteristiche

Linear chain wire-drawing machine with useful drawing-work length variable on request (5 mt. about standard), studied for heavy-duty wire-drawing operations.
Max drawing 2000 kg. with opening of the self-centring pincers max 25 mm.The drawing speed is controlled from the work station and adjustable from 1 to 10 meters per minute .
The carriage has shock absorbers and a special idraulic gripping system. Automatic carriage return with safety device.
The traction group is composed with a gear reducer in oil bath and a vectorial asynchronous three-phase motor.
Minimum maintenance with simple level controls every 2000 hours of working.
There is the possibility to release the carriage at intermediate stroke with safety device. Die-plates lubrication and adjustable working plan.
Construction standards in accordance to “CE” with respective documentation.
- Installed horse power 4 KW.
- Power supply 380 V. 50 HZ. 3-phase

Accessori

- Double speed.
- Electronic variation of speed.
- Machine in two separate parts to facilitate the Carriage.
- Lubrication on the wire-drawing plate with recirculation system.
- Works plan with adjustable height.
- Counter stretcher for pipes.
- Chamfering equipment for plate.
- Frame for anchorate pin.
- Winder for output wire.
- Useful length 7/9/11 meters on request.

TVN TECH S.r.l. - MACCHINE PER ORAFI / MACHINERY FOR GOLDSMITHS

Via XXV Aprile n. 72 - 52048 Monte San Savino (Arezzo) Italy
Tel. (0575) 810157 - 849149 - Fax (0575) 849149 - E-mail:info@tvntech.it - www.tvntech.it
Cod.Fisc., P.Iva e Reg.Imp.AR IT 02191740519 - R.E.A. 168488
Capitale sociale € 10.000,00 I.V.

Trafile a catena

Trafila a catena 2000 Kg. di tiro Mod. TK 20/EK

Dimensioni

Lung.	6950
Larg.	880
Alt.	1400
Peso circa	1380
Pot.	4

Caratteristiche

Trafila a catena lineare con corsa di lavoro a richiesta (standard 5 mt. circa), studiata per lavori pesanti di trafilatura.
Trafilatura max 2000 kg. con apertura pinze autocentranti max 25 mm. Velocità di trafilatura regolabile da 1 a 10 metri al minuto, comandata dal posto di lavoro.
Carrello ammortizzato con speciale sistema di chiusura Idraulico . Ritorno carrello automatico con sicurezza.
Il gruppo trazione è composto da un riduttore a ingranaggi a bagno d'olio e da un motore vettoriale asincrono trifase.
Manutenzione ridotta a semplici controlli di livello ogni 2000 ore circa di lavoro. Possibilità di sgancio del carrello a corse intermedie con sicurezza.
Costruzione secondo normative "CE" con relativa documentazione.
- Potenza installata KW 4
- Alimentazione 380 V. 50 HZ. Trifase

Accessori

- Doppia velocità.
- Variazione elettronica della velocità.
- Divisione macchina per facilitare il trasporto.
- Lubrificazione su filiere con ricircolo.
- Piano di lavoro con altezza regolabile.
- Contro pinza sfila tubi.
- Smussatore per lastra.
- Telaio porta spina ancorata.
- Bobinatore per filo in uscita.
- Lunghezze utili a richiesta: 7/9/11 mt.

TVN TECH S.r.l. - MACCHINE PER ORAFI / MACHINERY FOR GOLDSMITHS

Via XXV Aprile n. 72 - 52048 Monte San Savino (Arezzo) Italy
Tel. (0575) 810157 - 849149 - Fax (0575) 849149 - E-mail:info@tvntech.it - www.tvntech.it
Cod.Fisc., P.Iva e Reg.Imp.AR IT 02191740519 - R.E.A. 168488
Capitale sociale € 10.000,00 I.V.